

# Specification Sheet

**Manufacturer**

RHINO

**Model**

LD-145

**Order Code**

LD-145

**Short Description**

Outdoor Fridge

**GTIN/EAN**

5060482005660



**Long Description**

The Rhino LD145 is a professional grade outdoor refrigerator, designed to perform in temperatures of up to 41°C. It carries an independently certified outdoor safety rating (IP24) meaning that it can withstand a tropical downpour as well as a baking hot summer. The visible exterior surfaces are constructed from 304 grade brushed stainless steel and the interior is finished in black ABS. Fan assisted cooling, combined with an advanced variable speed compressor, ensure even temperatures throughout the cabinet, keeping your drinks perfectly chilled. Durable, stylish, and designed for luxury outdoor living – it's the upgrade your garden deserves.

**Features**

- Professional grade commercial beverage cooler
- IP24 safety rated for outdoor use
- LED interior lighting
- Brushed 304 stainless steel exterior (except rear)
- Left Hand Hinge Option
- Electronic control with automatic defrost
- Lock
- Adjustable temperature 2-12°C
- Must not be positioned in direct sunlight
- Must not be used where there is salt spray

Dimensions			
	External	Internal	Packed
Height (mm)	870	680	945
Width (mm)	520	438	670
Depth (mm)	595	457	585

Weight			
Net Weight (Kg)	37	Gross (Packed) Weight (Kg)	40

Ventilation			
Ventilation Top (mm)	20	Ventilation Sides (mm)	20
Ventilation Rear (mm)	20		

Capacities			
Gross Volume (l)	137	Net Volume (l)	125
Net Useable Volume (l)	117	330ml Can	120
500ml Can	78		


Aesthetics & Technical Features			
Exterior Finish	304 grade stainless steel	Interior Finish	Black ABS
Lighting	LED	Light Colour Temp (k)	6000
Feet / Castors	Adjustable Feet	Lock	Yes
No. Of Shelves	3	Shelf Size (mm)	422x426
Shelf Type	Chrome Wire	Door Type	Right Hand Hinge
Reversible Door	No	Temperature Display	Digital
Power Switch	Yes	Light Switch	Yes
Controller	Digital		

Refrigeration			
Temperature Range (°C)	2-12	Climate Class	CC3
Temperature Class	K4	Max Ambient	41°C
Refrigerant	R600a	Refrigerant Charge (g)	28
Insulation Type	Cyclopentane		

Electrical & Energy Performance			
Energy Rating	A	EEl	0.095
Energy (kWh/24hr)	0.27	Annual Energy (kWh)	98
Power Supply	13 Amp	Input Power (W)	100
Running Current (A)	0.7	Voltage/Frequency	220-240 V ~ 50 Hz
IP Rating	IPX4	Cable Length (m)	1.8

Noise			
Noise Level dB(A)	38		

Technical Diagram

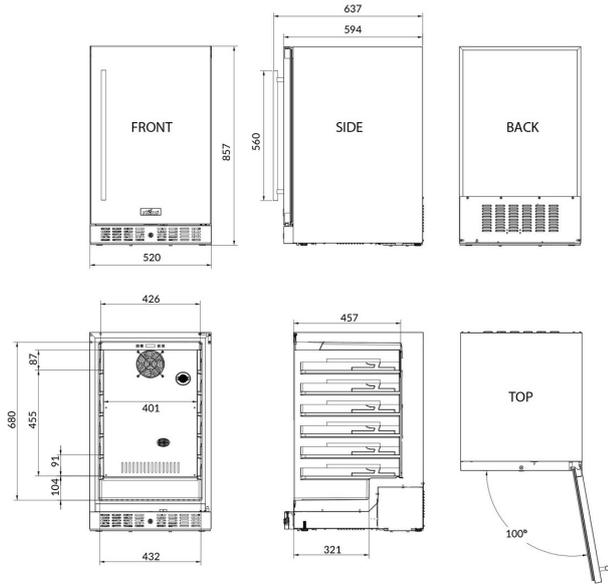

Energy Label



Rhino LD145



**98** kWh/annum

  
**125** L

 **5°C**

 **≤ 41°C**

2021/745